



PETROL / LPG


Motor Petrol	Kohler CH680 V2 – 674 rpm
Power	16,8 kW / 22,5 cm ³ - 3.600 rpm

Motor LPG	Kohler CH730 LP V2 – 725 rpm
Power	16 kW / 21,5 cm ³ - 3.600 rpm

Unloaded weight	1.250 kg (basic equipment)
Water tank	340 l
Snow bin	1 m ³ compacted 1,25 m ³
Fuel tank	15 l
Drive	Hydraulic stepless
Axles	Single wheel drive
Steering	Hydraulic

Footbrake	Hydraulic
Parking brake	Mechanical parking brake on rear wheels
Hydraulic system	18 cm ³ axial piston pump for drive, 6 cm ³ work units + cylinder movements, 4,4 cm ³ steering
Diameter of screw conveyors	180 mm

Wheelbase	1.230 mm
Track width	1.025 mm
Track radius	2.740 mm
Turning radius	2.900 mm
Dimensions	LxWxH 3.014 x 1.497 x 2.000 mm
Ground clearance	100 mm
Blade width	1.400 mm

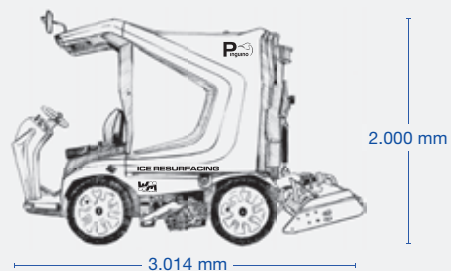



WM PINGUINO PETROL / LPG

STANDARD EQUIPMENT

- ▶ Parking brake
- ▶ 2 board guide rollers
- ▶ Watertank-snowbin made of stainless steel
- ▶ Spring suspended drivers seat
- ▶ Horn
- ▶ Easily accessible engine compartment (tiltable drivers seat, hydraulically tiltable snowtank)
- ▶ Hydraulic power steering
- ▶ 2 hydraulically powered screw conveyors
- ▶ Hydraulic carriage pressure system
- ▶ Hydraulic opening and closing of snow bin cover
- ▶ Manual blade adjustment
- ▶ Tilttable planing device for easy, safe blade changing
- ▶ Tilttable operator's platform (2 positions)

OPTIONALS

- ▶ 4-wheel drive
- ▶ Brush
- ▶ Mirror kit
- ▶ Flashing light
- ▶ Light package
- ▶ Water tank level indicator
- ▶ Conveyor screw overload indicator
- ▶ Rear view camera
- ▶ Washing system connection for vertical screw conveyor
- ▶ Washing system for horizontal screw conveyor
- ▶ Slip surface extension

